



## DRAGON WING – REFLECTIVE SMOKE 1117

FITS '96-UP FLHT MODELS (FLHT, FLHTC, FLHTCU, FLHX, ETC.)

### PARTS INCLUDED

- 1 Right Dragon Wing Assembly – Reflective Smoke
- 1 Left Dragon Wing Assembly – Reflective Smoke
- 1 Hardware Kit Including:
  - 6 10–24 x 3/4" Knurled Thumb Screw Black
  - 2 Thumb Tab for Dragon Wing
- 1 Installation Instruction

*Please read and understand entire instructions before starting installation.*

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

**ATTENTION!** It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

**CAUTION!** Clean only with warm water and a mild, non-abrasive soap. Some cleaning products contain harsh chemicals that can severely damage product and void warranty.

### TOOLS SUGGESTED


Set of Standard Hex Key Wrenches

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

### PROCEDURE

**STEP 1** Remove the three plastic buttons shown in FIG.1. If you have H-D or other aftermarket fairing mount air deflectors, the plastic buttons may have been replaced with thumbscrews. If so, remove the thumbscrews.

-cont.-

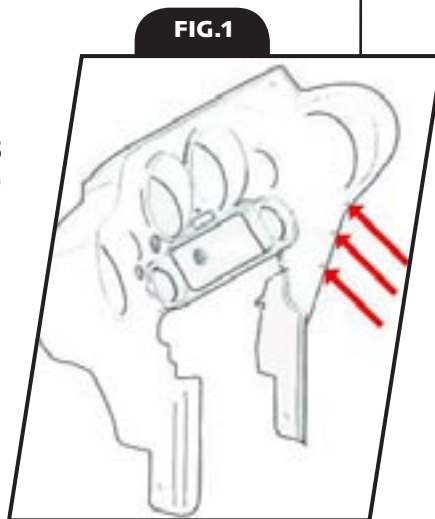

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



**STEP 2** Determine which side is left and which is right. The Fasteners and hinge mechanisms will only be visible from the rider position. See [FIG.2](#).

**STEP 3** Starting with the left side, hold the Dragon Wing in place. Line up the mounting holes of the Dragon Wing with the mounting holes in the fairing. Secure the Dragon Wing to the fairing using the supplied 10-24 X 3/4" Knurled Thumb screws. Tighten snugly, but do not over tighten.

**STEP 4** Repeat STEP 3 for the right side.

#### POINTS FOR ADJUSTMENT

Grip the inner "wing" portion of the Dragon Wing. Gently pull the wing downward, toward the ground to free the wing from it's locking mechanism. Rotate the wing into any of the four available positions. Three lockable open positions as well as fully closed. The spring in the lower wing mount will automatically push the wing into the nearest locking position as the wing is rotated.

*Ride On!*

**FIG.2**

