



UNIVERSAL HANDLEBAR ACCESSORY MOUNT 1421

FITS: 1" BAR, UNIVERSAL APPLICATIONS, ACCEPTS BELT CLIPS, 4-HOLE AMP'S PATTERN (1-3/16" X 1-1/2" SPACING) AND SLOTS FOR UNIVERSAL MOUNTING

PARTS INCLUDED

- 1 Mount Plate
- 1 Thumb Screw
- 1 Lock Washer
- 1 Hook and Loop Strap
- 1 1" Handlebar Clamp
- 1 Adhesive Foam
- 1 Anti-Seize
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

CAUTION! Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

ATTENTION! It is the installer's responsibility to ensure all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

ATTENTION! It is the installer's responsibility to ensure that any attached device is secure. Kuryakyn is not responsible for lost or damaged devices.

ATTENTION! Be sure to use the supplied anti-seize on all threaded fasteners before installation. This will reduce galling and make future removal of the fasteners easier.

NOTE Installation is shown on a 2007 V-Star 1300; while representative of typical procedure, there may be minor differences when installed on other models.

TOOLS SUGGESTED

Set of hex wrenches


PROCEDURE

STEP 1 Remove the two screws in the handlebar clamp to separate the two halves.

STEP 2 Place the clamp halves around the 1" bar and secure with the two screws removed in STEP 1.

STEP 3 Insert the Accessory Mount into the clamp as shown in PIC.1.

-cont.-

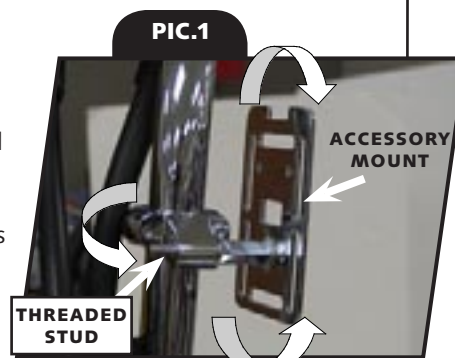

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



STEP 4 Place the included split lockwasher onto the protruding end of the threaded stud; ensure that the washer locates over the shoulder of the stud.

NOTE Put a few drops of the included anti-seize on the threaded stud.

STEP 5 Thread the included thumbscrew onto the stud.

STEP 6 Adjust the Accessory Mount, tighten the thumbscrew, and clamp screws.

NOTE Use the included hook and loop strap to additionally secure the mounted device. See [PIC.2](#).


NOTE The included adhesive foam can be used to fill excess space if your clip is loose and provide a soft mounting surface for your device. See [PIC.3](#) and [PIC.4](#).

Küryakyn

PIC.2



PIC.3

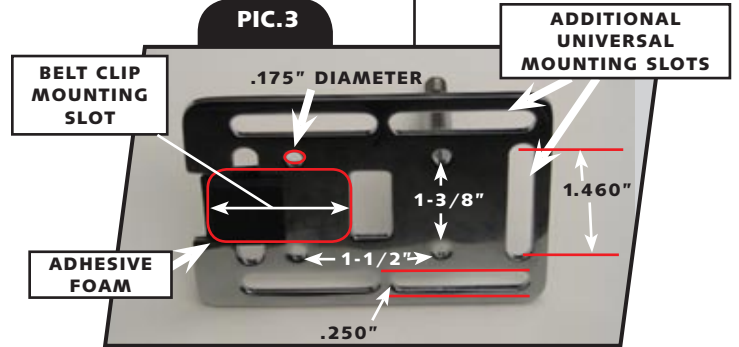

PIC.4



Ride On!

PAGE

2