



## UNIVERSAL HANDLEBAR ACCESSORY MOUNT 1461

**FITS: UNIVERSAL FOR CLUTCH OR BRAKE PERCH MOUNTING, BOLTS VERTICAL SPACING CENTER TO CENTER AT 1-1/16" TO 1-1/2" APART TO ACCEPT INCLUDED M6X1 OR 1/4-20 BOLTS.**

- HONDA:** ALL GL 1500/1800 MODELS, ALL VTX 1300/1800 MODELS, SHADOW 750 AERO, ACE, & SPIRIT, SHADOW 1100.
- KAWASAKI:** ALL VULCAN 900 MODELS, VULCAN 1500/1600 INCLUDING MEAN STREAK, ALL VULCAN 2000.
- SUZUKI:** BOULEVARD M/C 50, C90, M109.
- YAMAHA:** ALL ROAD STAR & WARRIOR MODELS, ALL V STAR MODELS, ALL VENTURE MODELS.
- H-D:** CLUTCH OR BRAKE PERCH MOUNTS, ALL '82-UP MODELS.

### PARTS INCLUDED

- 1 Control Mount Arm
- 1 Mounting Plate
- 1 Top Hat Washer
- 1 Thumb Nut
- 2 .325id-.600d x .025 thick shims
- 1 Hardware Kit Including:
  - 2 1/4-20 x 2" Button Head Cap Screw (BHCS)
  - 2 1/4-20 x 2-1/4" Button Head Cap Screw (BHCS)
  - 2 M6 x 1.0 x55mm Button Socket Cap Screw (BSCS)
  - 2 Washers
  - 2 Spacers
- 1 Universal Handlebar Accessory Mount Hardware Kit including:
  - 2 3/4" x 2" Foam Adhesive Pads
  - 2 8" x 1" Hook and Loop Straps
- 1 Installation Instructions

*Please read and understand entire instructions before starting installation.*

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**WARNING!** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

### TOOLS SUGGESTED

Set of hex wrenches.

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

**-cont.-**

**CUSTOMER SERVICE**  
877.370.3604 (toll free)

**INSTALLATION QUESTIONS**  
techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in non-conforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



## PROCEDURE

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

**STEP 2** Place a clean, soft blanket over the gas tank to protect the paint.

**CAUTION!** Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

**STEP 3** Remove the bottom screw securing the clutch perch halves as shown in PIC. 1; this will not be used again.

**STEP 4** Identify the correct screw, either the metric or standard, by comparing threads on the included screws to the threads from the screws that were removed (the long 1/4-20 screws are generally used in older H-D motorcycles.)

**STEP 5** Place the washer over the screw, then insert through the control mount arm and place the spacer over the screw as shown in PIC. 2.

**STEP 6** Place the arm, screw washer and spacer on the perch and start the screw, as shown in PIC. 3. Do not tighten the screw yet.

**STEP 7** Remove the upper screw securing the perch mounting halves; it will not be used again.

**STEP 8** Rotate the arm up into position and install the screw, washer, and spacer in the same order as in STEP 5.

**STEP 9** Tighten both of the screws securing the arm.

**NOTE:** This product is designed to mount in a fixed position or so that it can swivel. The following steps will indicate how to use the product in either of these manners.

**STEP 10** To mount so that the mounting plate is fixed, place the shaft through the mounting arm, place one of the shims over the protruding end and secure with the thumb nut as shown in PIC. 4.

**STEP 11** To mount so that the mounting plate can swivel, place a shim over the shaft, then place the shaft through the mounting arm. Place the top hat washer over the protruding end as shown in PIC. 5 so that the flat side is facing the thumb nut.

**STEP 12** Turn the handlebars in both directions to their full stop position and ensure that there is clearance between the mounting plate/accessory and the gas tank, dash and other accessories.

**WARNING!** ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED, INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH.

**STEP 13** Adjust the mounting plate as necessary to achieve sufficient clearance.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

**CAUTION!** Küryakyn is not responsible for items that may be stolen or damaged in relation to the use of this product.


-cont.-

# Küryakyn®

PIC. 1




PIC. 2

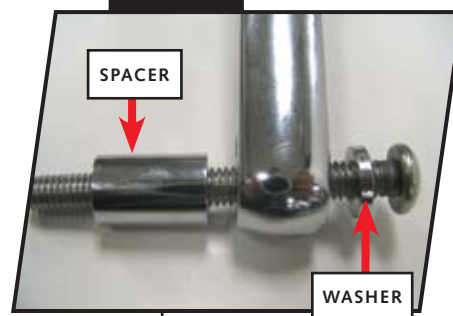

PIC. 3



PIC. 4

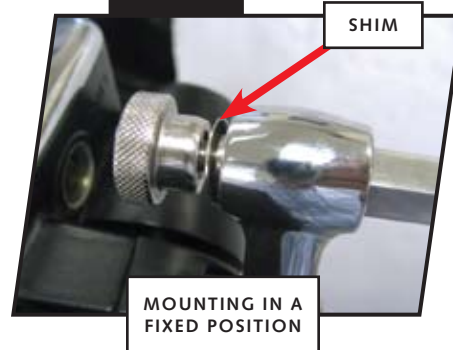

PAGE

2

**NOTE:** For additional security of the device, use the included hook and loop strap. See PIC. 6.

**NOTE:** The included adhesive foam can be used to fill excess space if your clip is loose and provide a soft mounting surface for your device. See PIC. 7.

*Ride On!*

