



UNIVERSAL HANDLEBAR ACCESSORY MOUNT 1473

FITS: UNIVERSAL FOR CLUTCH OR BRAKE PERCH MOUNTING, BOLTS VERTICAL SPACING CENTER TO CENTER AT 1-1/8" TO 1-11/16" APART TO ACCEPT INCLUDED M6X1 OR 1/4-20 BOLTS.

HONDA: ALL GL 1500/1800 MODELS, ALL VTX 1300/1800 MODELS, SHADOW 750 AERO, ACE, & SPIRIT, SHADOW 1100

KAWASAKI: ALL VULCAN 900 MODELS, VULCAN 1500/1600 INCLUDING MEAN STREAK, ALL VULCAN 2000

SUZUKI: BOULEVARD M/C 50, C90, M109

YAMAHA: ALL ROAD STAR & WARRIOR MODELS, ALL V STAR MODELS, ALL VENTURE MODELS

H-D: CLUTCH OR BRAKE PERCH MOUNTS, ALL '82 & UP MODELS

PARTS INCLUDED

- 1 Perch Mount Arm/Mount Plate Assembly
1 Perch Mount Kit
2 1/4-20 x 2" Button Socket Cap Screws
2 1/4-20 x 2-1/4" Button Socket Cap Screws
2 M6 x 1.0 x 55mm Button Socket Cap Screws
2 Washers
2 Spacers
1 Universal Handlebar Accessory Mount Kit
2 3/4" x 2" Adhesive Foam Pads
1 8" x 1/2" Hook and Loop Strap
1 Anti-Seize Packet
1 Hardware Kit
2 Shims
1 Thumb Nut
1 5/16" Split Lock Washer
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches

CUSTOMER SERVICE 877.370.3604 (toll free)

INSTALLATION QUESTIONS techsupport@kuryakyn.com or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
The product must be properly installed, maintained and operated under normal conditions.
Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

**Küryakyn®**

**PROCEDURE** - Please note that all hardware included may not be used for installation

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

**STEP 2** Place a clean, soft blanket over the gas tank to protect the paint.

**CAUTION!** Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

**STEP 3** Remove the bottom screw securing the clutch perch halves as shown in [PIC 1](#); this will not be used again.

**STEP 4** Identify the correct screw, either the metric or standard, by comparing threads on the included screws to the threads from the screws that were removed (the long 1/4-20 screws are generally used in older H-D motorcycles.)

**STEP 5** As shown in [PIC 2](#), place the washer over the screw, then insert through the perch mount arm and place the spacer over the screw then add a dab of anti-seize to the screw end.

**STEP 6** As shown in [PIC 3](#), place the arm, screw, washer and spacer on the perch and start the screw, finger tighten the screw.

**STEP 7** Remove the upper screw securing the perch mounting halves; it will not be used again.

**STEP 8** Rotate the arm up into position and install the screw, washer, and spacer, while using a dab of anti-seize as in [STEP 5](#).

**STEP 9** Tighten both of the screws securing the arm.

**STEP 10** To mount the mounting plate, place the shaft through the perch mount arm, place the split lock washer and two of the shims ([PIC 4](#)) over the protruding end. Use a dab of anti-seize on the threads and secure with the thumb nut.

**STEP 11** Turn the handlebars in both directions to their full stop position and ensure that there is clearance between the mounting plate/accessory and the gas tank, dash and other accessories.

**WARNING!** ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED, INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH.

**STEP 12** Adjust the mounting plate as necessary to achieve sufficient clearance. Tighten all fasteners

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

**CAUTION!** Küryakyn is not responsible for items that may be stolen or damaged in relation to the use of this product.


**NOTE** For additional security of the device, use the included hook and loop strap. See [PIC 5](#).

**NOTE** The included adhesive foam can be used to fill excess space if your clip is loose and provide a soft mounting surface for your device. See [PIC 6](#).

**PIC. 1**



**PIC. 2**

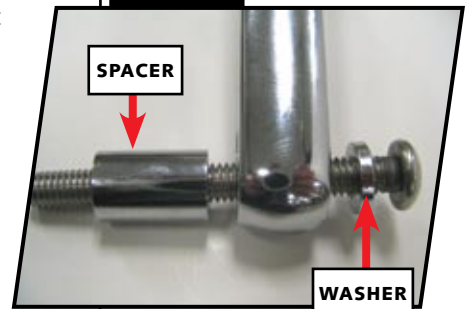

**PIC. 3**



**PIC. 4**



**PAGE**

**2**

*Ride On!*

**ACCESSORY MOUNT**

**INSTALLATION**

PIC. 5



FOR ADDITIONAL SECURITY OF THE DEVICE, USE THE INCLUDED HOOK AND LOOP STRAP

PIC. 6

