



GRANTAILGATER BAG 4172

FITS: UNIVERSAL APPLICATIONS

PARTS INCLUDED

- 1 GranTailgater Bag Assembly:
 - 1 Rain Cover
 - 1 Backrest Pad
 - 1 Cooler
 - 4 Adjustable straps with clips
 - 2 Straps with hook and loop adjuster
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

NOTES

- This bag can be mounted to the motorcycle many different ways. These instructions provide a general overview of likely possibilities.
- Installation shown on a V-Star 1100 and a Road King; while representative of typical procedure, there may be minor differences when installed on other models.

WARNING! THIS IS A LARGE BAG; DO NOT OVERLOAD YOUR MOTORCYCLE.

CAUTION! Please refer to your motorcycle load limitations before loading and operating.

CAUTION! Ensure that all the compartments are completely zipped up and the transport handle fully collapsed before operation.

SISSY BAR MOUNTING PROCEDURE

STEP 1 Open up both sides of the hook and loop flaps; set the bag on the passenger pillion.

STEP 2 Tightly fold the right side flap over the sissy bar and secure it to the inside of the left flap.

-cont.-

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Küryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Küryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



STEP 3 Fold the left flap back over the sissy bar and secure it to the right side of the bag; this will create a very secure, “doubled up” anchor point to the motorcycle. See [PIC. 1](#), [PIC. 2](#), and [PIC. 3](#).

STEP 4 The bag can now be further secured to the motorcycle with the included straps. Hook one end of a strap through a “D” ring on the bottom of the bag; attach the other end to a passenger foot peg mount, turn signal bar or some other anchor point free from moving parts, extreme heat or pinch points.

STEP 5 Ensure the bag has been mounted sturdily before loading and operating the motorcycle.

OPTIONAL SISSY BAR MOUNTING PROCEDURE

NOTE: The bag can be mounted with the hook and loop strips facing forward to allow the use of an included driver backrest. You will need to secure the bag using the included straps.

STEP 6 Set the bag on the passenger seat.

STEP 7 Secure the GranTailgater bag to the motorcycle using the included straps. Clip one end of a strap into a “D” ring on the bottom of the bag and secure the other end to a passenger foot peg mount, turn signal bar or some other anchor point free from moving parts, extreme heat or pinch points.

NOTE For normal loads, a four point tie down arrangement is acceptable. For heavier loads, it is recommended that you stabilize the bag using the additional two straps secured to an anchor point free from moving parts, extreme heat or pinch points.

STEP 8 Locate the included driver backrest; secure it to the bag with the hook and loop strips on the flaps on the back of the bag. See [PIC.4](#).

STEP 9 Position the backrest for comfort; ensure the bag has been mounted sturdily before loading and operating the motorcycle.

CAUTION! Do not rest all of your weight directly on the backrest; it is not intended as a support.

REAR RACK MOUNTING PROCEDURE

CAUTION! Do not overload the bag in this position. Follow your motorcycle's and your rear rack's weight limits.



STEP 10 Open up both sides of the hook and loop flaps; set the bag on the rear rack.

STEP 11 Tightly fold the right side flap over the sissy bar and secure it to the inside of the left flap.

STEP 12 Fold the left flap back over the sissy bar and secure it to the right side of the bag; this will create a very secure, “doubled up” anchor point to the motorcycle. See [PIC.5](#).

STEP 13 The bag can now be further secured to the motorcycle with the included straps. Hook one end of a strap through a “D” ring on the bottom of the bag; attach the other end to a passenger foot peg mount, turn signal bar or some other anchor point free from moving parts, extreme heat or pinch points.

-cont.-

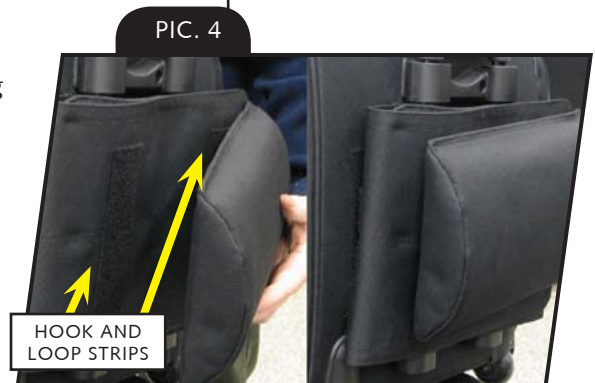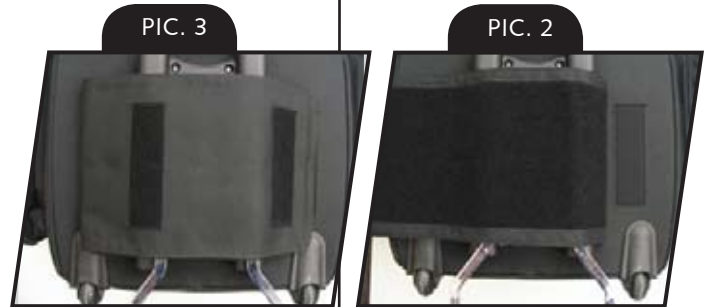

NOTE: For normal loads, a four point tie down arrangement is acceptable. For heavier loads, it is recommended that you stabilize the bag using the additional two straps secured to an anchor point free from moving parts, extreme heat or pinch points.

STEP 14 Ensure the bag has been mounted sturdily before loading and operating the motorcycle.

RAIN COVER PROCEDURE

STEP 1 Remove the rain cover from the storage compartment, encase the bag with the cover and pull the drawstring tight around the bottom of the bag. Ensure that the rain cover is wrapped tightly under the bag for best protection.

TRANSPORT HANDLE

STEP 1 Press the button on the top of the handle in and pull upwards until the handle locks in place, release the button.

STEP 2 To collapse the handle, press the button in and push downward until the handle locks in place.

Ride On!