



ADJUSTABLE PASSENGER PEGS

4570

FOR SCREAMIN' EAGLE

FITS '04 -UP FLHTCSE AND FLHTCUSE MODELS, AND ANY OTHER TOURING MODEL THAT HAS BEEN OUTFITTED WITH H-D'S CHROME PASSENGER FOOTBOARD SUPPORT KIT, H-D P/N 52714-04.

PARTS INCLUDED

- 1 LH Top Mount and Pivot Arm Assembly, Chrome
- 1 LH Bottom Mount, Chrome
- 1 LH Rest Stop, Nylon
- 1 RH Top Mount and Pivot Arm Assembly, Chrome
- 1 RH Bottom Mount, Chrome
- 1 RH Rest Stop, Nylon
- 2 Footpegs
- 6 5/16-18 x 1-1/2" SHCS Fastener
- 6 5/16-18 Split Lock Washer
- 2 1/4-20 x 1-1/2" SHCS Fastener
- 2 1/4-20 Split Lock Washer
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

PLEASE NOTE

It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

TOOLS SUGGESTED


Allen wrenches

ATTENTION! A factory service manual may be helpful in performing this installation. Do not attempt to perform this installation if you are not confident in your ability to complete all steps in the procedure; consult a trained technician.

PROCEDURE

STEP 1 Install the left and right rest stops onto the tabs on the left and right bottom mounts. The high side of the rest stop goes toward the side of the mount with the two 5/16-18 through holes. See PIC.1.

-cont.-

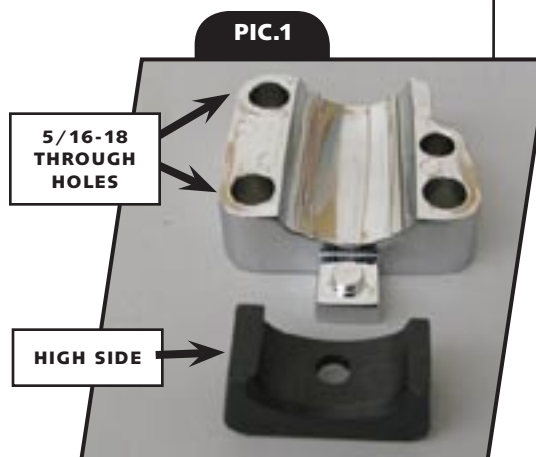

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

· Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).

· The product must be properly installed, maintained and operated under normal conditions.

· Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.

· Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.

· Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.

· Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.

· Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



STEP 2 Fold up the passenger footboard then place the top mount and pivot arm assembly over the footboard support. Check for proper clearance between the top mount and the footboard. See PIC.2.

STEP 3 Install the bottom mount and secure to the top mount with the supplied hardware. Be sure to install the 1/4-20 fastener in the proper location. Tighten the fasteners evenly; do not over-tighten.

STEP 4 Install the footpeg and adjust the position for comfort. Secure with the supplied fastener. See PIC.3.

STEP 5 To adjust the position of the pivot arm, move the knob out of the locked position and rotate the pivot arm to the desired position. Move the knob back into the locked position. See PIC.4.


ATTENTION! BEFORE RIDING, BE SURE ALL FASTENERS ARE SECURE AND THAT THE PASSENGER PEGS DO NOT INTERFERE WITH THE PROPER OPERATION OF ANY MOVING COMPONENTS.

Ride On!

Kuryakyn

PIC.2

CHECK CLEARANCE BETWEEN MOUNT AND FLOORBOARD

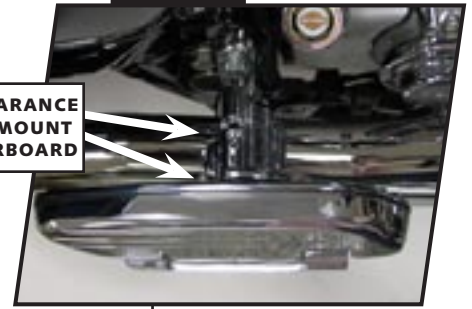

PIC.3



PIC.4

