



INSTALLATION



ROTOR COVERS FOR GL1800 7451

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn™ product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA™ All Rights reserved.

WITH AMBER RING OF FIRE

FITS: GL1800

PART #	INCLUDED
407450L	1 LH Rotor Cover — Chrome
407450R	1 RH Rotor Cover — Chrome
907450	1 Hardware Kit for Rotor Covers With the Following: 1 Left Mounting Bracket — Black Powder Coat 1 Right Mounting Bracket — Black Powder Coat 2 Adjustable inside Mounting Brackets (pre-assembled on left & right rotor cover) 2 M6 x 1.0 x 13 SHCS — Stainless 2 .234 I.D. x .425 O.D. x .020 Wave Washers — Stainless 3 M6 x 1.0 x 30mm BSCS. 18-8 SST 1 M6 X 1.0 x 35mm BSCS 18-8 SST 6 .250 I.D. x .625 O.D. x .08 Thick Rubber Washers 1 M6 x 1.0 Flange Lock Nut — Stainless 2 M6 x 1.0 x 23mm BSCS Shoulder Bolts
7390	1 GL1800 Ring of Fire, Amber, Including the Following: 2 Chrome Ring 2 Adhesive Strip 2 7400 Amber/Amber LED Assembly
907390W	1 Wire Kit Including: 1 Y-Adapter Plug 5-1/4" Long 1 Y-Wire Plug Connectors 22" Long 3 Heat Shrink Tubing 8 4" Cable Tie
307390	1 Installation Instructions
307451	1 Installation Instructions

THANK YOU FOR CHOOSING KÜRYAKYN!

NOTE

Use rubber washers under the heads of the metric button heads provided. The wave washers are used with the (2) socket head cap screws.


TOOLS SUGGESTED

5mm Allen Wrench, 12mm Box End or Socket Wrench, Splicing and Insulating Supplies

PROCEDURE

STEP 1 Remove the caliper cover bolts as shown in PIC.1.

-cont.-

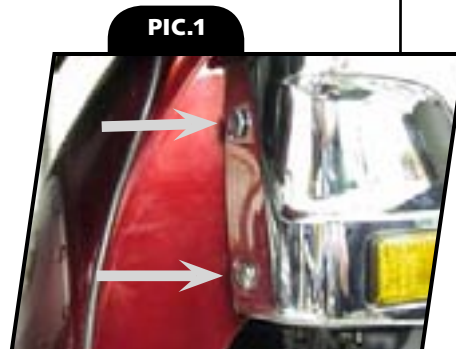

STEP 2 Remove the fender (and caliper cover) bolts as in [PIC.2](#). Remove caliper cover.

STEP 3 One side at a time, using your 12mm wrench, remove the pinch bolts from the bottom of the fork sliders and install the lower mounting brackets as shown in [PIC.3](#). Re-install and re-tighten the pinch bolts. The brackets are stamped "R" and "L" for right and left.

STEP 4 Install the rotor covers as shown in [PIC.4](#). The three M6 x 1.0 x 30mm BSCS 18-8 SST flange bolts will be used in the positions marked with arrows on the right side and bottom left side. The longer M6 X 1.0 x 35mm BSCS 18-8 SST will be used on the top left side shown in [PIC 7](#). A nut will be used at the top location on the right side if the hole is not threaded. Ring of Fire equipped models see wiring section below.

STEP 5 See [PIC.5](#). This lower mounting tab is adjustable. Before you mount the rotor covers, loosen the three tab mounting bolts slightly. When securing this mounting point to the mounting bracket, we suggest placing the socket head cap screw on the long end of an allen wrench, and maneuvering it into place through the bottom portion of the cooling slot in the rotor cover. When this mounting point is secure, the three small tab mounting bolts may be re-tightened.

STEP 6 See [PIC.6](#). Replace the caliper covers in the same manner they were removed. Replace the two fender mounting bolts with the two M6 x 1.0 x .910" shoulder bolts provided.


WIRING

Route the power leads as neatly and inconspicuously as possible. We suggest you bind the leads to each brake line. Plug each power lead into the supplied "Y" connector. Connect the black wire from the "Y" connector to a good chassis ground or ground wire. Connect the red power wire to your choice of switched power.

Ride On!

Kuryakyn™

PIC.2

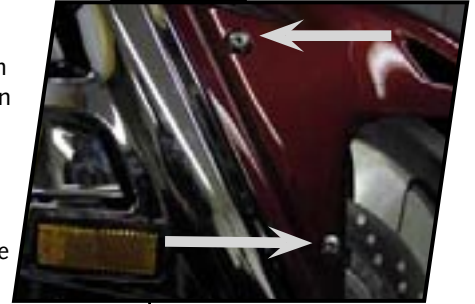

PIC.3



PIC.4



PIC.5



PIC.7



PIC.6



PAGE

2

ROTOR COVERS FOR GL1800

INSTALLATION