



INSTALLATION



5 TO 4 WIRE TRAILER CONVERTERS 7669

FITS: UNIVERSAL

PARTS INCLUDED

- 1 5 to 4 Trailer Converter
- 1 1/4" Ring Terminal
- 1 Dielectric Grease
- 6 8" Cable Ties
- 1 Installation Instructions

TOOLS SUGGESTED

Set of hex wrenches, combination wrenches, crimping pliers

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

PROCEDURE

NOTE: Parts shown on Honda GL1800 for picture purpose.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

-cont.-

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.


Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



STEP 2 Unplug the Trailer Isolation Relay kit from the 4-pin plug on the sub-harness.

STEP 3 Plug the 5 to 4 pin converter into the 4-pin plug from sub-harness.

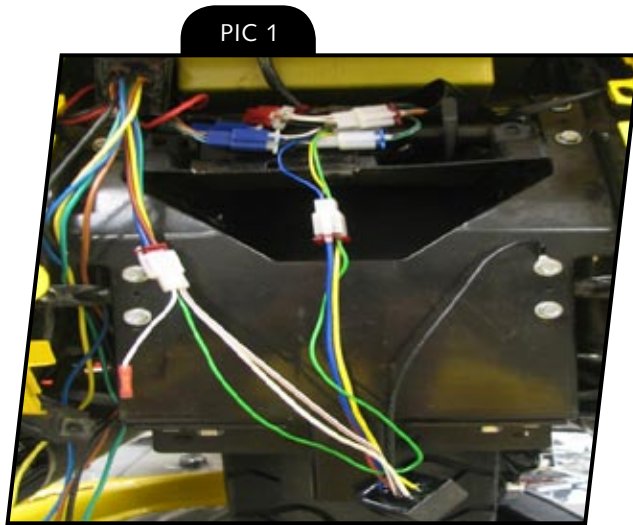

STEP 4 With the new converter connected, take the provided 1/4" ring terminal and crimp it onto the black ground wire that is on the 5-4 pin converter.(PIC 1)

STEP 5 Remove a nearby chassis bolt, take the 1/4" ring terminal, place the terminal behind the bolt, and reinstall the bolt. See PIC 1 (You may have to use sand paper to remove the paint to ensure a good grounding connection)

STEP 6 Reinstall the trailer isolation relay kit to the open plug on the 5 to 4 pin connector.

NOTE: This 5 to 4 wire trailer connector is for use when your desired trailer has a flat 4-wire connection.

CAUTION: The extra white wire that has the bullet connector is a keyed 12-volt power wire for any accessory light you may want on your trailer. This extra wire is not required for regular trailer use.

Ride On!