



SWINGARM COVERS FOR DYNA 7819

FITS: ALL '06-UP DYNA MODELS

PARTS INCLUDED

- 1 Right Swingarm Cover
- 1 Left Swingarm Cover
- 1 Hardware Kit Including:
 - 3 1/4-20 x 1/2" Hex Head Cap Screw (HHCS)
 - 3 1/4" Flat Washers
 - 3 Clamp Tabs
 - 3 Acorn Nuts
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of hex wrenches, combination wrenches, socket set and ratchet, Torx drivers.


STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

WARNING! YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

-cont.-

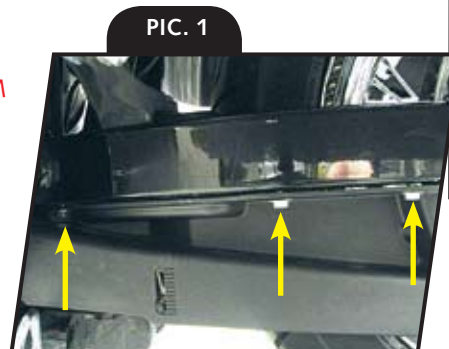

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY
Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in non-conforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG
You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



LEFT SIDE

STEP 2 Loosen the three bolts that secure the lower belt guard as shown in [PIC. 1](#).

STEP 3 Hold the left cover (refer to [PIC. 2](#)) at a slight angle to the swing arm and place the front of the cover behind the inner primary, then push the back of the cover in place.

STEP 4 Place the tabs on the bottom of the cover between the flat washer and the guard as shown in [PIC. 3](#).

STEP 5 Place the clamp tab behind the swingarm as shown in [PIC. 4](#) and secure to the cover by inserting a 1/4-20 x 1/2" HHCS screw through the backside of the tab; place 1/4" flat washer and acorn nut over the protruding end and tighten.

STEP 6 Tighten the three screws that secure the lower belt guard while pushing in on the cover.

STEP 7 Check the clearance to ensure that the cover will not interfere with the proper operation of the motorcycle.

RIGHT SIDE

STEP 8 Loosen the two screws that secure the passenger peg arm as shown in [PIC. 5](#).

STEP 9 Loosen the exhaust support bracket as shown in [PIC. 6](#).

NOTE: On '06 Models it may be necessary to remove the exhaust support arm to install the cover.

STEP 10 Slide the cover in from the back of the motorcycle.

STEP 11 Place the clamp tabs behind the swingarm as shown in [PIC. 4](#) and secure to the cover by inserting a 1/4-20 x 1/2" HHCS screw through the backside of the tabs; place 1/4" flat washer and acorn nut over the protruding ends and tighten them.

STEP 12 Tighten the bolts/nuts securing the exhaust support bracket.

STEP 13 Tighten the screws that secure the passenger peg arm.


STEP 14 Check the clearance to ensure that the cover will not interfere with the proper operation of the motorcycle.

CAUTION! Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

Ride On!


Kuryakyn[®]

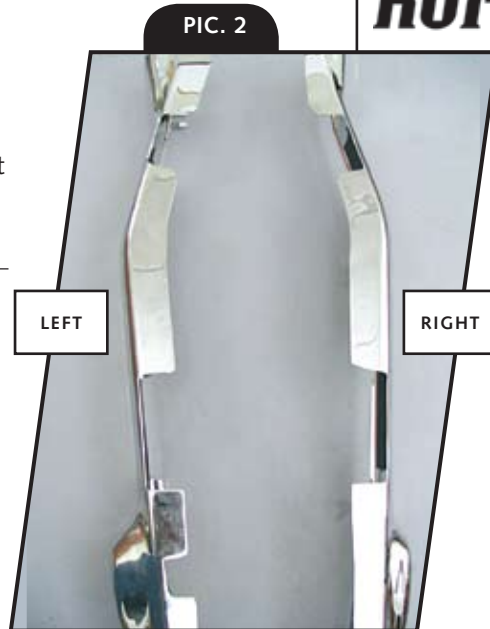

PIC. 2


LEFT

RIGHT

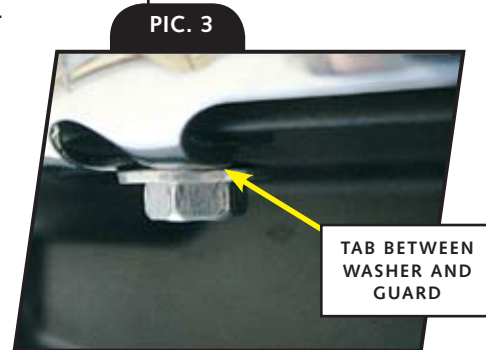


PIC. 3

TAB BETWEEN
WASHER AND
GUARD

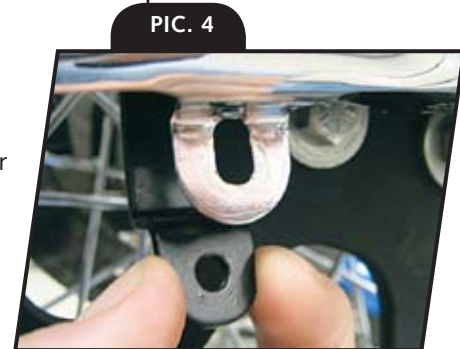


PIC. 4

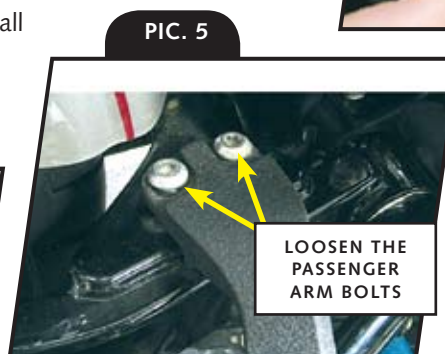

PIC. 5

LOOSEN THE
PASSENGER
ARM BOLTS

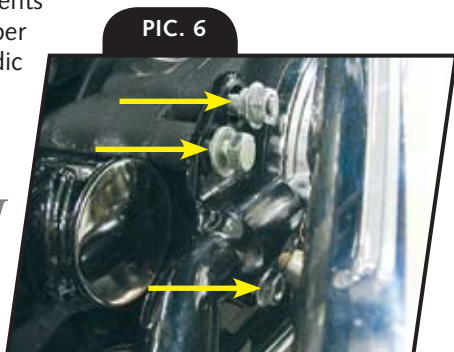

PIC. 6

PAGE

2