



INSTALLATION

EXTENDED CRUISE ARM MARK IV 7841

FITS ALL '00-UP FLST MODELS WITHOUT ENGINE GUARDS (EXCEPT '05-UP FLSTFSE)

PARTS INCLUDED

- 1 Right Cruise Arm Assembly, Extended Length
- 1 Left Cruise Arm Assembly, Extended Length
- 1 Right Side Mount Block
- 1 Left Side Mount Block
- 1 Cruise Arm Support
- 1 Hardware Kit, including:
 - 2 3/8-16 x 1-1/2" SHCS Fastener, Polished
 - 2 3/8-16 x 1" SHCS Fastener, Polished
 - 4 3/8" Flat Washer, Polished
 - 2 3/8-16 Nylock Nut, Polished
 - 2 5/16-24 x 1" SSS Setscrew
 - 2 Anti-Seize
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

PLEASE NOTE

It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

TOOLS SUGGESTED

Allen wrenches, combination wrenches.

ATTENTION! A factory service manual may be helpful in performing this installation. Do not attempt to perform this installation if you are not confident in your ability to complete all steps in the procedure; consult a trained technician.


ATTENTION! Be sure to use the supplied anti-seize on all threaded fasteners before installation. This will make future removal of the fasteners easier.

CAUTION! PREVENT POTENTIAL SERIOUS INJURIES! BE SURE ALL FASTENERS ARE SECURE AND THAT THE CRUISE ARMS DO NOT INTERFERE WITH PROPER OPERATION OF THE SHIFTER OR BRAKE BEFORE RIDING.

PROCEDURE

STEP 1 Install the set screws into the bottom of the mount blocks, then attach each mount block to the frame using 3/8-16 x 1-1/2" fasteners. The correct mounting location is shown in PIC.1.

STEP 2 Attach each extension arm assembly to the mount blocks with 3/8-16 x 1" fasteners.

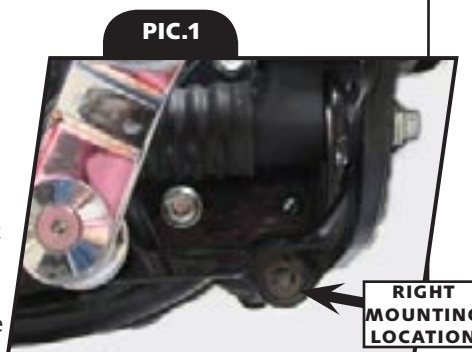

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



STEP 3 On one side of the cruise arm support, back the nuts off until the bottom of the skirted nut is flush with the end of the threaded shaft. On the opposite side of the cruise arm support, tighten the nuts down to the end of the threaded shaft. See [PIC.2](#) and [PIC.3](#).

STEP 4 Install the cruise arm support between the cruise arms; the skirted nuts fit over the cruise arm fasteners. Adjust the nuts on the cruise arm support until the support is centered between the cruise arms and the nuts are secure. See [PIC.4](#).

STEP 5 Adjust the cruise arms for comfort. Be sure both cruise arms are parallel and that they do not interfere with proper operation of the brake or shifter. See [FIG.1](#).

STEP 6 Install the footpegs (sold separately) and adjust the angle of the footpegs by loosening the set screw and rotating the clevis. See [FIG.1](#).

NOTE Position the Spitfire Clevis so the peg mount stop is on the topside, regardless of which side the clevis is installed on the bike. (See [PIC.6](#))

Ride On!


PIC.2



PIC.3



PIC.6

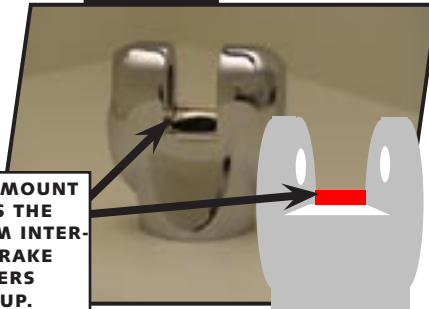

THE MALE PEG MOUNT STOP PREVENTS THE FOOT PEG FROM INTERFERING WITH BRAKE AND SHIFT LEVERS WHEN FOLDED UP.

PIC.4



PIC.5



FIG.1

