



PEG MOUNTED CRUISE MOUNTS 7887

WITH MALE ADAPTERS

THESE HIGHWAY PEGS CAN BE USED IN MANY H-D FORWARD CONTROL OR PASSENGER PEG POSITIONS TO PROVIDE ALTERNATIVE FOOT POSITIONS. THESE FORWARD CONTROL HIGHWAY PEGS ARE COMPATIBLE WITH KÜRYAKYN STILETTO PEGS, SWITCHBLADE PEGS, DUALY ISO-PEGS, LARGE ISO-PEGS, SMALL ISO-PEGS, RETRO PEGS, PILOT PEGS, AND ISO-WING PEGS

PARTS INCLUDED

- 1 Left Side Assembly
1 Right Side Assembly
1 Hardware Kit, including:
2 5/16-18 x 2" SHCS Fastener, Stainless
2 5/16-18 x 2-3/8" SHCS Fastener, Stainless
2 5/16-18 x 3" SHCS Fastener, Stainless
2 5/16-18 x 4-3/4" SHCS Fastener, Stainless
4 Hot Spots 5/16", Chrome
2 Hot Spots 3/8", Chrome
2 Anti-Seize
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

PLEASE NOTE

It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

ATTENTION! Be sure to apply anti-seize compound to the threads of all fasteners before installation. This will make future removal of fasteners easier.

TOOLS SUGGESTED

Allen wrenches, combination wrenches, or socket set depending on your configuration.

WARNING! It is the installer's responsibility to ensure that the Forward Control Highway Pegs do not interfere with proper operation of the shift lever or the brake lever. Failure to do so may cause serious injuries or death.

WARNING! The Forward Control Highway Pegs are not compatible with any forward control or passenger footpeg mounts fastened to the motorcycle with only a single fastener. Leverage applied to the mount by the offset arm will cause the mount to "twist" and loosen from the motorcycle. This product must not be used with Kuryakyn forward controls for Dyna, FXR, Softail, or any other stock passenger peg mounts on FXR, '03-earlier XL, or Softail models. FAILURE TO HEED THIS WARNING MAY CAUSE SERIOUS INJURIES OR DEATH.

PROCEDURE

STEP 1 Determine if your footpeg mounts are compatible with the forward control highway pegs. See PIC.1, PIC.2, PIC.3, and PIC.4 on the following page.

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Kuryakyn™ product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA™ All Rights reserved.



PIC.1



GOOD!
THIS TYPE OF FOOTPEG MOUNT CANNOT "TWIST" AND LOOSEN THE FASTENER SECURING IT TO THE MOTORCYCLE.

PIC.2




GOOD!
THIS TYPE OF FOOTPEG MOUNT CANNOT "TWIST" AND LOOSEN THE FASTENER SECURING IT TO THE MOTORCYCLE.

PIC.3



GOOD!
THIS TYPE OF FOOTPEG MOUNT CANNOT "TWIST" AND LOOSEN THE FASTENER SECURING IT TO THE MOTORCYCLE.

PIC.4

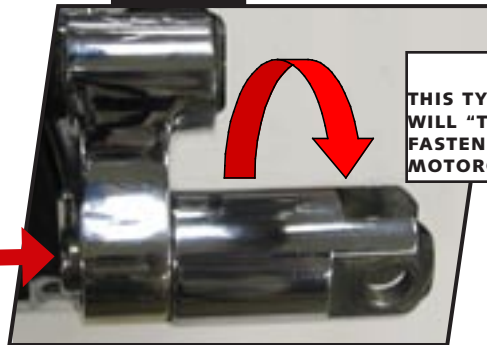

SINGLE FASTENER WILL TWIST LOOSE FROM LEVERAGE ON THE OFFSET ARM.


DANGER!
THIS TYPE OF FOOTPEG MOUNT WILL "TWIST" AND LOOSEN THE FASTENER SECURING IT TO THE MOTORCYCLE.

STEP 2 Remove the existing footpegs; save the hardware.

STEP 3 Loosely assemble the components, using [PIC.5](#) as a guide.

-cont.-

PIC.5

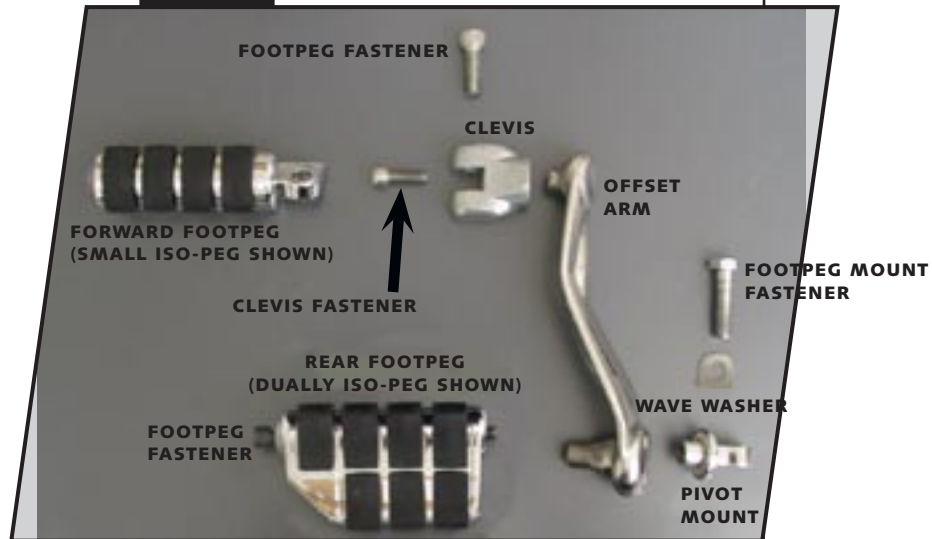

The forward footpeg position is compatible with any H-D style male mount footpeg. The rear footpeg position is only compatible with the footpegs listed below. Replace the stock rear footpeg fastener with the appropriate fastener as listed in the chart below.

Kuryakyn Peg	Replacement Fastener
Stiletto Pegs (P/N 4475)	3"
Switchblade Pegs (P/N 4445)	2-3/8"
Dually Pegs (P/N 8028)	4-3/4"
Large ISO Pegs (P/N 8002)	4-3/4"
Small ISO Pegs (P/N 8000)	4-3/4"
Retro Pegs (P/N 4400)	2"
Pilot Pegs (P/N 4425)	2-3/8"
ISO Wing Pegs (P/N 4450)	4-3/4"

STEP 4 Install the left and right side assemblies, reusing the saved hardware.


STEP 5 Adjust the position of the rear footpeg. The rear footpeg mounts to a splined cone and uses an internal fastener to secure it to the splined pivot mount. Loosen the fastener, adjust the position of the footpeg and offset arm. Tighten the fastener. See [PIC.6](#).

FOOTPEG FASTENER




STEP 6 Adjust the position of the forward footpeg. The forward footpeg mounts into a splined clevis; remove the footpeg, loosen the fastener and then adjust the position of the clevis. Remount the footpeg to the clevis with the supplied fastener. See [PIC.7](#) and [PIC.8](#).

PIC.7

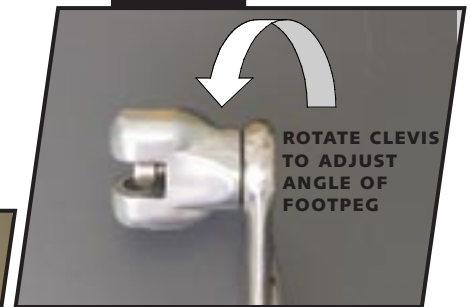

NOTE Position the Spitfire Clevis so the peg mount stop is on the topside, regardless of which side the clevis is installed on the bike. (See [PIC.9](#))

PIC.9

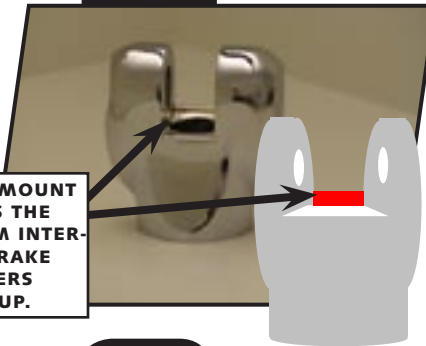

THE MALE PEG MOUNT STOP PREVENTS THE FOOT PEG FROM INTERFERING WITH BRAKE AND SHIFT LEVERS WHEN FOLDED UP.

STEP 7 Verify the position of the footpegs for comfort. If mounted in the forward control position, be sure the Highway Pegs do not interfere with proper operation of the shift lever or the brake lever. See [PIC.10](#).

PIC.10



STEP 8 Install the Hot Spots. Install the 5/16" Hot Spots over the forward and rear footpeg fastener heads. Install the 3/8" Hot Spots over the clevis-to-footpeg fastener.

PIC.8



Ride On!