



FRONT CALIPER COVER

8701

FITS: ALL '06-UP ROADLINER AND STRATOLINER MODELS, ALL '04-UP ROAD STAR 1700 MODELS (EXCEPT WARRIOR), ALL '08-UP RAIDER MODELS, '03-UP YZF-R6/R6S, '00-UP YZF-R1, '06-UP FZ1, '07-UP FZ6

PARTS INCLUDED

- 2 Front Caliper Cover
2 Black Inner Panel
2 Alcohol Pad
2 Black Tape Strips
2 Die Cut Tape
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of hex wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

STEP 2 The Caliper Cover can be installed with or without the Black Inner Caliper Panel. Test fit the Caliper Cover to the front brake caliper and determine the best fit.

STEP 3 If excessively dirty, clean the mounting area with mild soap and rinse with clean water; dry the caliper completely. Clean the area again with the supplied alcohol pads and allow the area to dry.

ATTENTION! Ensure the area of installation is free of grease, oil, dirt or other debris to ensure proper adhesion. Kuryakyn WILL NOT issue a warranty on any parts lost due to improper installation.

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
The product must be properly installed, maintained and operated under normal conditions.
Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.

-cont.-



## INSTALLED WITHOUT THE BLACK INNER PANEL


**STEP 1** Rub the adhesive backing (both pieces; PIC 1) on the Caliper Cover to activate the adhesive.

**NOTE** The extra adhesive strips included may be used as additional support for mounting the caliper covers.

**STEP 2** Remove the tape backing and mount the Caliper Cover to the Front Brake Caliper (PIC 2). Hold in place for one minute, full bonding strength will occur in 24 hours.

**ATTENTION!** The adhesive will not bond correctly if applied at temperatures less than 50°F. Do not attempt this installation in temperatures less than 50°F.

**CAUTION!** Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

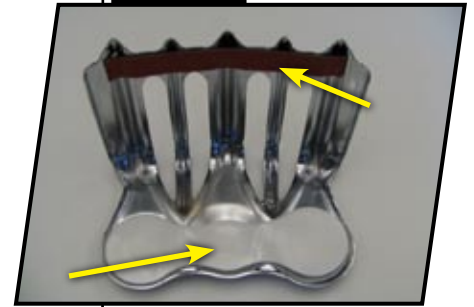

PIC. 1

## INSTALLED WITH THE BLACK INNER PANEL

**STEP 1** Clean the mounting area and apply one Die Cut Tape to the Black Inner Panel (PIC 3). Clean the backside of the Black Inner Panel with the supplied alcohol pad (PIC 4)

**STEP 2** Rub the adhesive backing on the Front Caliper Cover (both pieces; PIC 1) to activate the adhesive.

**STEP 3** Remove the tape backing on the Caliper Cover and apply the Black Inner Panel inside of the Caliper Cover (PIC 5). Hold in place for one minute, full bonding strength will occur in 24 hours.


**NOTE** The extra adhesive strips included may be used as additional support for mounting the caliper covers.

**STEP 4** Rub the adhesive on the Black Inner Panel to activate the adhesive.

**STEP 5** Remove the tape backing and mount the Caliper Cover Assembly to the Front Brake Caliper (PIC 6). Hold in place for one minute, full bonding strength will occur in 24 hours.

**ATTENTION!** The adhesive will not bond correctly if applied at temperatures less than 50°F. Do not attempt this installation in temperatures less than 50°F.

**CAUTION!** Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

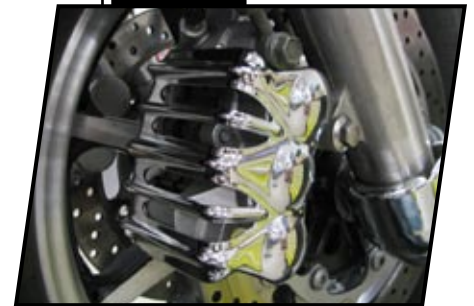

PIC. 2



PIC. 3



PIC. 4



PIC. 5



PIC. 6