



DADDY MACK/EZ CHOCK PREMIUM TIE DOWNS 962

UNIVERSAL

PARTS INCLUDED

- 2 Daddy Mack/EZ Chock Premium Tie Downs
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

SECURING LOAD/INSTALLATION

STEP 1 Read and understand all steps in the instructions before using this product.

CAUTION! Do not exceed working load of 600 lbs. per strap.

STEP 2 Pull up on the middle quick-release and hold while you fully open the ratchet. (Refer to PIC. 1)

STEP 3 Strap will become loose and ratchet wheel will rotate freely, pull the bottom hook out as far as possible.

STEP 4 Secure the bottom hook to a stationary location.

STEP 5 Once the bottom hook has been secured, press the release tab to adjust the top cinch strap (PIC. 3) to the desired length.


ATTENTION! Hooks must be in a straight line with the direction of the pull.

ATTENTION! Route straps away from sharp edges and hot surfaces.

ATTENTION! Secure all straps away from visible painted surfaces, moving parts, pinch points or extreme heat.

STEP 6 Wrap the soft sleeves around a secure location on the motorcycle and hook the top hook through the loop. (PIC. 3)

-cont.-

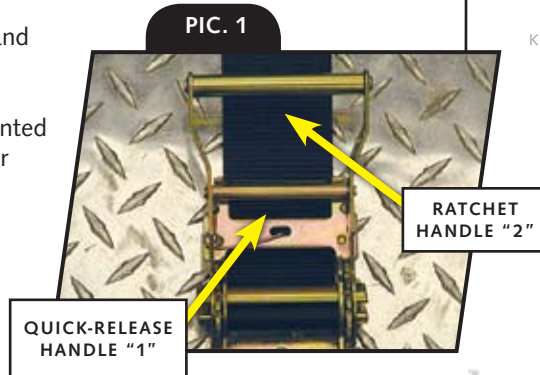

CUSTOMER SERVICE 877.370.3604 (toll free)

INSTALLATION QUESTIONS techsupport@kuryakyn.com or call 715.247.2983

LIMITED WARRANTY Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in non-conforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today--select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.



CAUTION! Ensure that no wires or cables will be damaged when using this product. Küryakyn is not responsible for damage to wires/cables as a result of misplacement of this product.

Küryakyn[®]

STEP 7 When top and bottom hooks are secure, sit on the motorcycle and simultaneously pull cinch straps towards you as shown in PIC. 3.

STEP 8 Once both sides have been evenly tightened, get off the bike and move to the ratchets.

STEP 9 Pull quick release handle "1" to release the ratchet; release the quick-release handle and move ratchet handle "2" back and forth to tighten the strap.

STEP 10 Repeat for the other ratchet.

STEP 11 Once you have your load secured, pull quick-release handle "1" and push handle "2" down to the lock position as shown in PIC. 4.

CAUTION! Periodically check tension of straps and re-tighten if necessary.

NOTE: Make sure to tighten both sides evenly to eliminate the risk of tipping over.

RELEASING STRAP

STEP 1 Hold ratchet handle "2" and pull quick-release handle "1" to release the ratchet; open the ratchet to the fully open position.

NOTE: Load may have shifted during transport, secure the load with your free hand while releasing the straps to prevent the load from tipping.

STEP 2 Once the tension on the ratchets has been released, you can loosen the cinch straps by pressing the release tab.

STEP 3 Remove top and bottom hooks.

ATTENTION! Store in a dry location out of direct sunlight.

Ride On!

