



## DECO FRONT SHIFT ARM COVER 1044

**FITS: FITS '82-UP DRESSERS, ROAD KINGS, ROAD GLIDE, STREET GLIDE WITHOUT KURYAKYN FRONT INNER PRIMARY EXTENSION, P/N 8289 OR 8370**

### PARTS INCLUDED

- 1 Deco Front Shift Arm Cover
- 1 Spacer Washer
- 1 Alcohol Pad
- 1 Installation Instructions

*Please read and understand entire instructions before starting installation.*

### THANK YOU FOR CHOOSING KÜRYAKYN!

**WARNING!** YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

**CAUTION!** Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

**ATTENTION!** It is the installer's responsibility to ensure all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

**ATTENTION!** Ensure the area of installation is free of grease, oil, dirt, or other debris to ensure proper adhesion. Kuryakyn WILL NOT warranty any parts lost due to improper installation.

**ATTENTION!** The adhesive will not bond correctly if applied at temperatures less than 50°F. Do not attempt this installation in temperatures less than 50°F.

### TOOLS SUGGESTED

Combination wrenches, soapy water and a clean rag

### PROCEDURE


**STEP 1** Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

**STEP 2** Remove the front of the stock shift linkage from the shift lever. See PIC.1.

**STEP 3** Clean the shift lever with soapy water and a clean rag; allow to dry completely.

**STEP 4** Wipe the shift lever with the included alcohol pad; allow to dry completely.

-cont.-

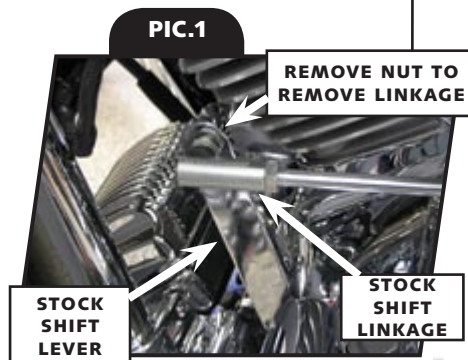

### CUSTOMER SERVICE

877.370.3604 (toll free)

### INSTALLATION QUESTIONS

techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



**STEP 5** Rub the adhesive backing on the inside of the Deco Front Shift Arm Cover to activate the adhesive.

**STEP 6** Remove the adhesive backing.

**STEP 7** Hold the cover in place; align the holes in the cover and the shift lever. See [PIC.2](#).

**STEP 8** Press the cover into place and hold for 60 seconds for the best adhesion.

**STEP 9** Reinstall the stock shift linkage and secure it with the nut removed in STEP 2.

**NOTE** Use the spacer washer if needed for clearance on shift linkage, if necessary.

**STEP 10** Ensure proper clearance and operation before riding the motorcycle.

*Ride On!*

**Kuryakyn**

**PIC.2**



**PAGE**

**2**