



SPEAKERS & AMPLIFIERS 4174

GRANTAILGATER

FITS: UNIVERSAL APPLICATIONS, ACCEPTS MUSIC FROM STANDARD HEADPHONE JACK (IPOD, PERSONAL CD PLAYER, MP3 PLAYER, ETC.)

PARTS INCLUDED

- 1 Speakers (pr)
1 Quick-connect battery cable
1 Amplifier
1 Music player connecting cable
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KURYAKYN!

PLEASE NOTE

It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

WARNING! Avoid electrical shock. Do not use this product in wet/damp conditions.

ATTENTION! Turn off the amplifier when not in use.

ATTENTION! Use of this product other than intended use voids any Kuryakyn warranty.

TOOLS SUGGESTED

Set of combination wrenches

QUICK-CONNECT BATTERY CABLE PROCEDURE


NOTE See the "Cable Connecting Procedure" section if you are going to use 4 "AA" batteries to power the amplifier.

STEP 1 Gain access to the motorcycle battery. Refer to your motorcycle owner's manual for specific instructions.

STEP 2 Connect the ring terminal that HAS THE FUSE LINK on it to the positive battery terminal. See PIC.1.

STEP 3 Connect the other ring terminal to the negative battery terminal. See PIC.1.

STEP 4 Secure the quick-connect cable to a location that will allow easy access once the covers, seats and panels have been reinstalled; use zip ties (not included) to secure the cable. Plan ahead; ensure that there will be enough cable to reach the amplifier during typical use.

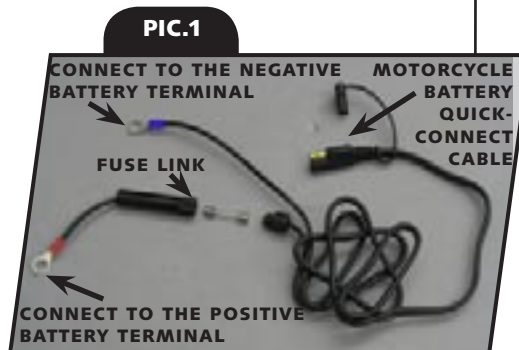

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Kuryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.



**ATTENTION!** Ensure that the cable is routed away from any moving parts or extreme heat. Kuryakyn **WILL NOT** warranty any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

**NOTE** Keep the cover on the quick-connect cables when not in use.

## GRAN TAILGATER PROCEDURE

**STEP 5** Fully unzip a side pocket (shown in [PIC.2](#)).

**STEP 6** Undo the velcro flap and put a speaker into the speaker pocket shown in [PIC.2](#).

**STEP 7** Route the speaker cable as shown in [PIC.3](#); secure the velcro flap.

**STEP 8** Route the cable to where the amplifier will be stowed; use the cable ports to route the cable through the bag.

**STEP 9** Repeat STEP 5 through STEP 8 for the other side.



## CABLE CONNECTING PROCEDURE

**STEP 10** Join the quick connect cable coming from the motorcycle battery to the quick connector from the amplifier. If the motorcycle battery will not be used, install four "AA" batteries in the amplifier. See [PIC.4](#).

**CAUTION!** Turn the volume all the way down and ensure the power selection switch is in the off position before making any cable connections to prevent speaker damage.



**STEP 11** Plug the left speaker cable into the jack marked "L-Output"; push the cable completely into the jack.

**STEP 12** Plug the right speaker cable into the jack marked "R-Output"; again, push the cable completely into the jack.

**STEP 13** Connect your music source cable to the jack marked "input"; push the cable completely into the jack.




## PLAYBACK PROCEDURE

**STEP 1** Connect all cables as described in the previous section.

**STEP 2** Turn on the amplifier by selecting a power source, the motorcycle battery or "AA" batteries. See [FIG.1](#).

**STEP 3** Begin playback on your music source.

**STEP 4** Slowly turn up the volume on the amplifier until you hear your music.

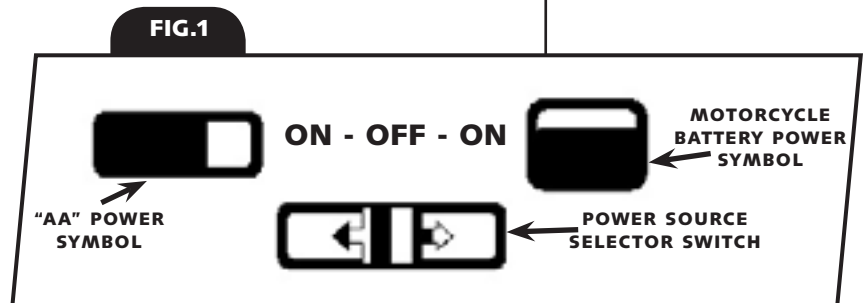

-cont.-

## REPLACING THE FUSE

**STEP 1** Twist the fuse holder to separate the two halves. See [PIC.5](#).

**STEP 2** Replace the blown fuse with a new 3 amp fuse.


**CAUTION!** Never replace the fuse with one that exceeds a 3 amp rating.

**STEP 3** Reconnect the two halves by pushing in and twisting. See [PIC.5](#).

*Ride On!*

# Küryakyn®

**PIC.5**

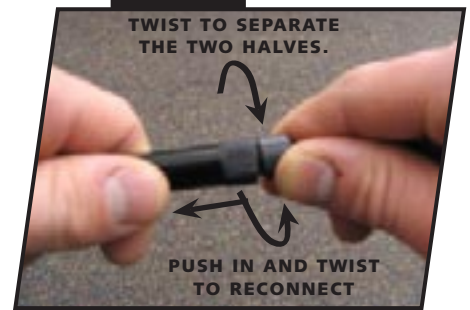

**PAGE**

**3**